

Butterfield Industries, Inc.

FLOW THROUGH ANTI-ICE KIT

KIT PART NUMBER BI 1001-1


CURRENT LIST PRICE: \$ 2,975.00

INSTALL TIME: approximately 10-15 hours

[Installation Instructions](#) (88kb)

[Drawings](#) (716kb)

requires [Adobe Acrobat Reader](#)

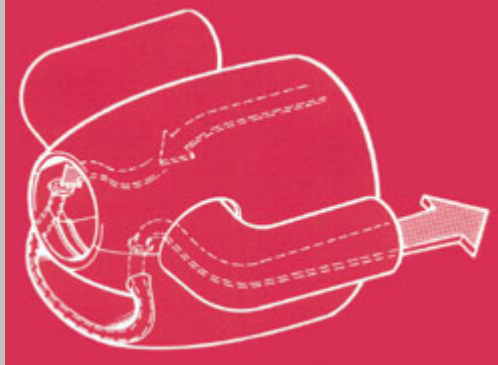

In the original configuration, hot exhaust gas is extracted from both exhaust stacks and is ducted down both sides of the intake lip, to heat the lip and then exits out the bottom of the cowling just aft of the lip.

The Butterfield Industries Flow Through kit changes this. The hot gas is now extracted from the right side only. It is then ducted down the right side, passes all the way through the duct, then comes up the left side of the cowling and exits out the left exhaust stack.

The modification consists of blocking of the present exit on the bottom of the cowling, shortening the tube on the front of the exhaust stack and installing a flexible hose assembly to seal the system.

[back](#)